

1/6

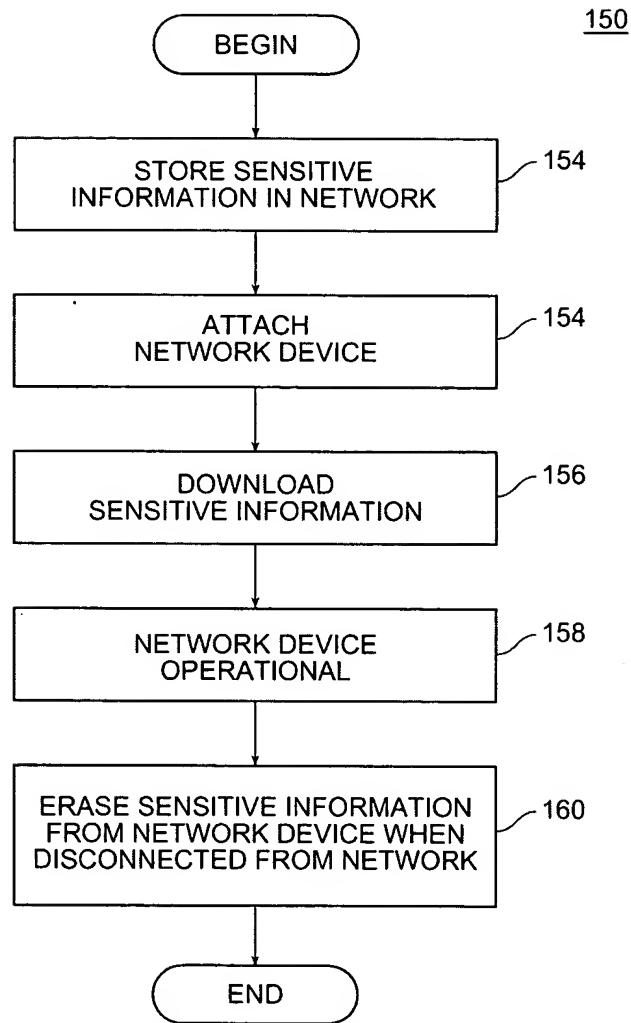


FIG. 1

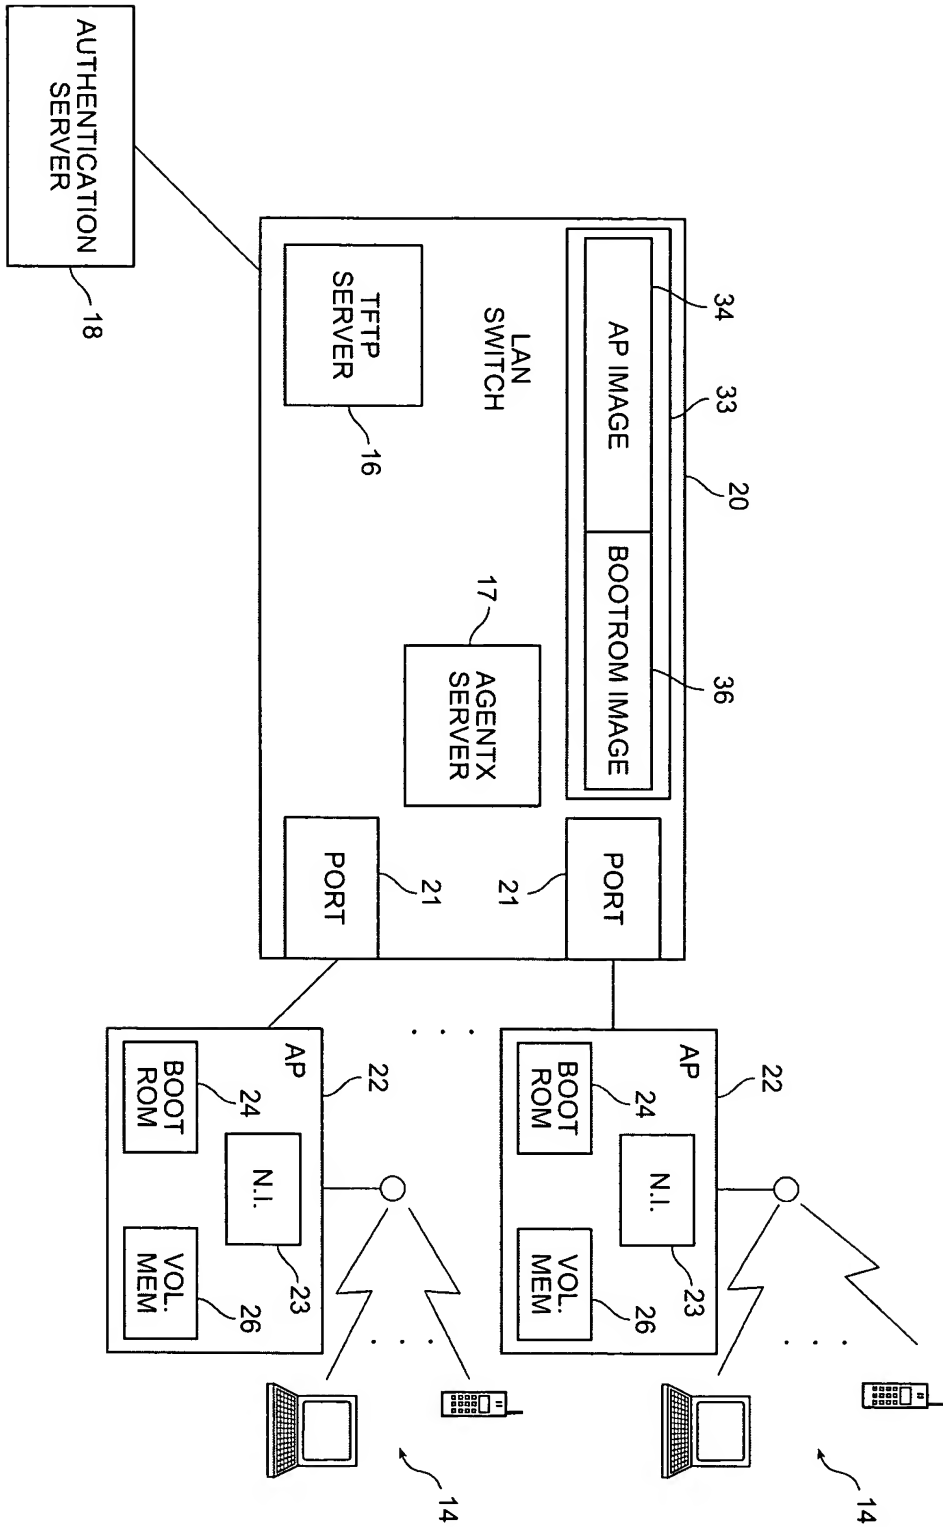


FIG. 2

FIG. 3

4/6

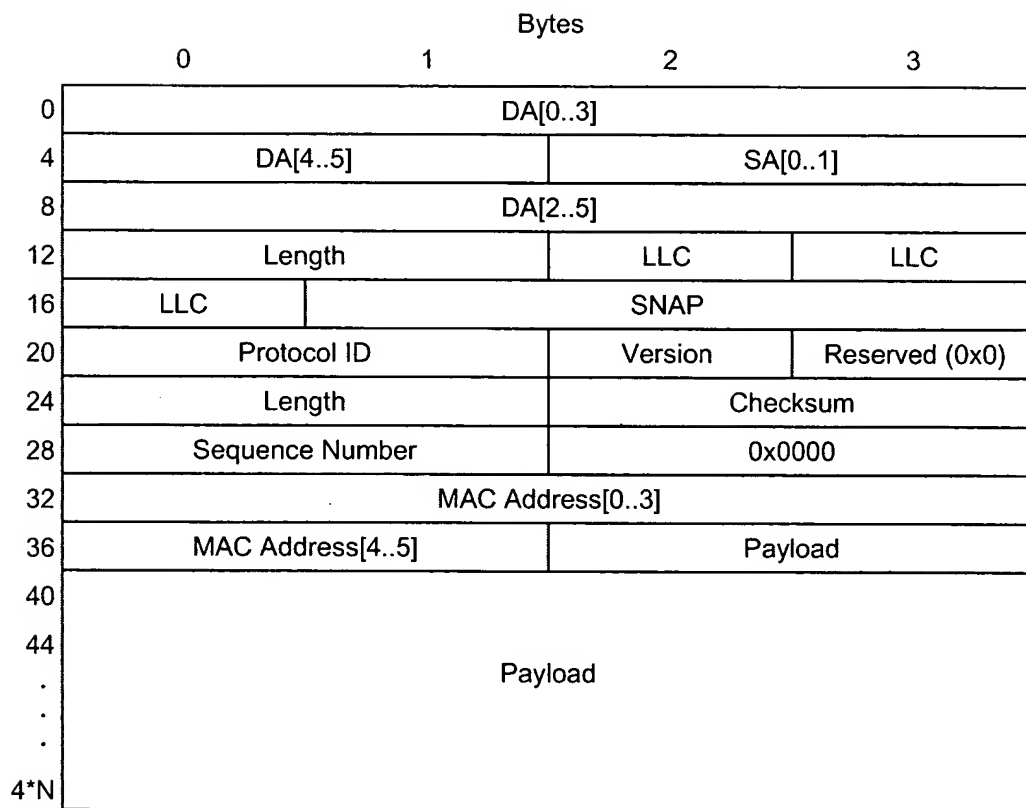


FIG. 4

5/6

		Bytes		
	0	1	2	3
0	0x99	AP_Announce	Length	
4	Hardware ID[0..3]			
8	Hardware ID[4..7]			
12	Hardware ID[8..11]			
16	Hardware ID[12..15]			
20	HW Major Rev.	HW Minor Rev.	HW Build#	
24	Boot Major Rev.	Bootrom Minor Rev.	Bootrom Build#	
28	Serial number[0..3]			
32	Serial number[4..7]			
36	Serial number[8..9]		AP Ethernet MAC[0..1]	
40	AP Ethernet MAC[2..5]			
44	HW_POST_STATUS			
48	HW_POST_OK			

FIG. 5

	Bytes			
	0	1	2	3
0	0x99	Announce_Reply	Length	
4	AP IP Address			
8	AP IP Mask	Use_VLAN_TAG	VLAN Tag	
12	Default Gateway			
16	Switch IP Address			
20	AgentX Port		Physical SW Port if_index	
24	Keep-Alive Period	Image Type	Reserved	
28	Boot URL			
32	Boot URL			
36	Boot URL			

FIG. 6

6/6

Bytes			
0	1	2	3
0	0x99	Renew_Config	Length
4	AP IP Address		
8	AP IP Mask	Use_VLAN_TAG	VLAN Tag
12	Default Gateway		
16	Switch IP Address		
20	AgentX Port		Physical SW Port index
24	Keep-Alive Period	Reserved 8	Reserved 16

FIG. 7

Bytes			
0	1	2	3
0	0x99	TFTP_OK	Length
4	Image Type	Status	Reserved
			Retry #

FIG. 8

Bytes			
0	1	2	3
0	0x99	AP_Keep_Alive	Length

FIG. 9

Bytes			
0	1	2	3
0	0x99	AP_Reset	Length

FIG. 10